

DRIFTER™

Diameter: 10.00" inches

Height: 2.87" inches

Weight - 6 Lbs.

Fig. 1

Mounting Kit:

Short screw:
.75"-1.25" surface thickness

Long screw:
1.25"-1.50" surface thickness

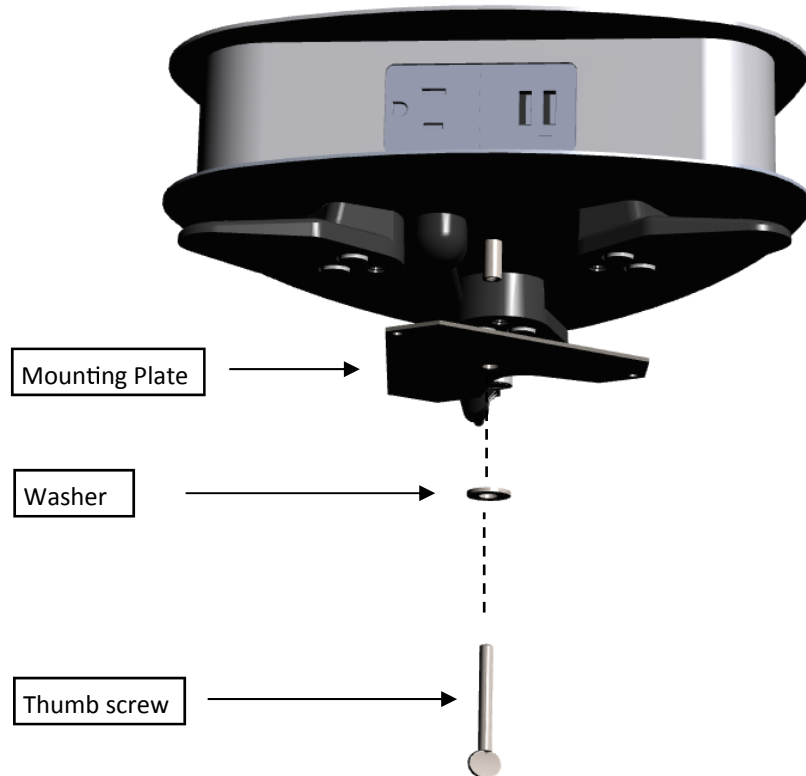


Fig. 2

Instructions for use:

1. Place Drifter at the location for use. Disengage the magnetic catch, uncoil the cord from the base and plug into a standard 120V power source.
2. To store the unit, wind the cord around the feet and engage the magnetic catch.

Instructions for securing:

1. If you are securing the Drifter to the work surface, select the correct Thumb screw for the surface thickness (Fig. 1). Next, place the washer and plate over the screw in that order (Fig. 2), and from below the work surface thread the screw into the anchor stud. Tighten the thumbscrew until the Drifter is secure.

Drifter™ Installation Instructions and Technical Information

Drifter™ Technical Information

- ETL Listed
- Receptacle:
 - (3)15A 120 Volt Tamper Resistant receptacles compliant with 2011 NEC® code.
 - (6) USB charging ports that work with USB compatible devices.
 - USB Rating: 2100 mA 5V/DC.
- 108" Power cord.
- Integral feet provide .75" floor clearance, and convenient cord storage.
- Magnetic catch secures cord when not in use.
- Integral anchor stud in the base allows the unit to be permanently anchored if desired.
- Design allows for 360 degree power access.

Cautions & Warnings

WARNING: FAILURE TO FOLLOW CAUTIONS AND WARNINGS BELOW COULD RESULT IN ELECTRICAL SHOCK, FIRE, PROPERTY DAMAGE, PERSONAL INJURY OR DEATH.

Cautions:

- Read Instructions · Read all warnings and operating instructions before using.
- Retain Instructions · Retain this instruction sheet for future use.
- Never use in a wet environment. Never allow liquid of any kind to spill onto or enter any part of the Drifter.
- Follow Warnings · Read and follow all warnings and directions in this instruction sheet and marked on Equipment.
- Service · There are no user serviceable parts in this product. Do not open or modify this product in any manner.

Warnings:

- Power Source · This product is only to be operated from the power source indicated on the product. Use only with a grounded (neutral) conductor. For safety do not bypass or disable the third (grounding) pin.
- Power Disconnection · To remove powered devices safely grasp device plug and pull straight from powered outlet.
- Do not pull on device cord or remove plug from any angle other than straight from outlet. Never touch metal conductors on plug during connecting or removal from product.
- Power Cord · Route products power cords where they will not be stepped on, pinched, have devices placed on them or become a tripping hazard. Never allow power cords to sit in any liquid or get wet in any manner.
- Location · This product is intended to be used in a dry environment only.