


flipIT® Kits for Laptops and LCDs

flipIT® Installs in Your Desktops for Convenience & Security

flipIT® Installation Considerations

Your contractor can install flipIT® products into any work surface fixture with this criteria:

- 8 inches required in front of unit for keyboard to retract. If keyboard is not required, less than 8 inches is acceptable, but no less than 3 inches for structural integrity.
- 2.75" required in back of unit for structural integrity. Monitors usually mount such that they extend below the flipIT® lid. When closed, this space is necessary for monitor parking space.
- 3 inches of width is required on the side of the cutout where the lock will be installed.
- 1 inch minimum width of clear space is required for installation of the keyboard tray, tabs turned in.
- Optimal spacing allows 3 - 4 inches of clear space on both sides of the cutout.
- Minimum clear space width spacing:
flipIT 23 = 30 inches flipIT 18 Laptop Safe = 24 inches flipIT 19 = 30 inches
- Clearance distance under surface for operation = 8.5 inches
- Clearance distance overhead for operation = 9 inches
- Recommended distance for from floor to under side of desktop for keyboard mounting = 29-29.25 inches
- Recommended desktop thickness = 30mm (1.18 inches)
- Recommended desktop height for use with keyboard = 28 inches; with keyboard tray = 30 inches
- Optimal spacing for side-by-side stations = 30 inches point to point for flipIT® 18 and 19; 36 inches for flipIT® 23.
- Optimal table top widths for single workstations flipIT® 18 and 19 = 36 inches; flipIT® 23 = 44 inches

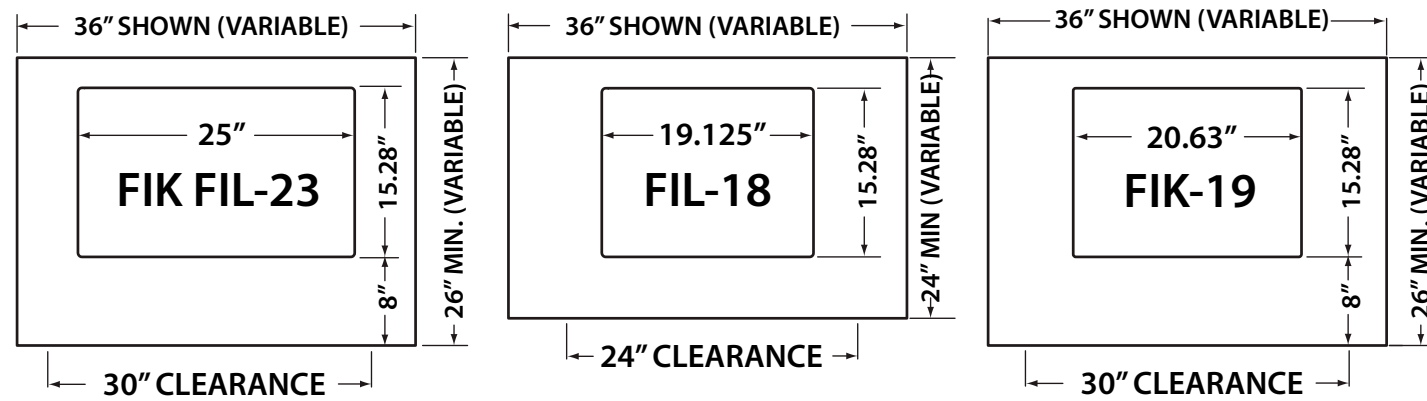

Materials:

- Lids are medium density fiberboard (MDF) finished in black thermofoil.
- Top surface lid color options for LCD Workstation models ONLY are black and unfinished MDF so your contractor can match the top to the rest of the cabinet.
- flipIT® Laptop Safe available ONLY in black
- All steel construction of flipIT® mechanical
- All finished metal parts are standard in black powdercoat; however, special order RAL color matches can be accommodated on a custom order basis.
- Made in USA

Model Numbers:

- FIK 19 flipIT® 19 with keyboard tray
- FIH 19 flipIT® 19 no keyboard tray
- FIK 23 flipIT® 23 with keyboard tray
- FIH 23 flipIT® 23 no keyboard tray
- FIL 18 flipIT® 18 Laptop Safe
- FIL 23 flipIT® 23 Laptop Safe

Distributed by:



www.smartdesks.com
800 770 7042



flipIT® Laptop Safe

Models FIL-18 and FIL-23 (shown)
Touch Latch Opening, Key Lock

Perfect for:

- Offices
- Conference Tables
- Presenter Podiums
- Reception Stations
- Customer Service Areas

Sizes:

- FIL-18 Compartment = 16 x 14.625 x 2.5
- FIL-23 Compartment = 22.5 x 14.625 x 2.5

flipIT® Workstations

Models FIK-23 and FIK-19 (shown)
Keyboard Tray Opening, Key Lock optional

Models FIH-23 and FIH-19
No Keyboard Tray, Key Lock optional

Flip 16:9 Wide Screen LCDs

- LCD flips under, keyboard retracts
- Lock option for controlled access
- Makes more work space

Sizes:

- FIK-19 Max LCD Case Width = 19 for most 20" diagonal 16:9 LCDs
- FIK-23 Max LCD Case Width = 23 for most 24" diagonal 16:9 LCDs





Unlock.
Touch to pop up.
Pull out tray.
Automatically opens.

To close, pull lid down and lock.



flipIT® 18 Laptop Safe

flipIT® Laptop Safe installs in any fixture

Provides a locked storage chamber and a work surface when laptop is stowed.

A charging cabinet at the point of use:
Laptop is served with power and data connections. These connections may be maintained when the laptop safe is closed and locked. Low batteries are never an issue.

flipIT® 18 Laptop Safe for most applications
flipIT® 23 for larger wide screen laptops

Both operate and install the same way. The flipIT® 23 has more room for data connections, accommodating larger wide screen laptop models. If a mouse is used, it stows on top of the laptop.



Universal wire management design allows cables to pass through for rear- and side-mounted power and data connections to laptop. Customized plate for specialized connections is available, optional.



flipIT® 23 Laptop Safe



Unlock. Pull keyboard tray open to a tipping point and the LCD opens by itself. To close, pull lid closed and lock.



Screen angle adjustable $\pm 15^\circ$. Semi-recessed position for better eye contact with patient. In closed position, becomes a work surface.

flipIT® LCD Workstations

Close and lock to provide security, and a work surface when closed.

Two sizes fit most popular monitor sizes. Ideal for any office or meeting space. The low screen position does not obstruct sight lines, so people can easily communicate.

Works great in conference room studios where cameras are used for teleconferencing. Data screens can now be placed in the personal spaces of participants, or flipped into the table top if not needed.



flipIT® 19 LCD Workstation for 16:9 Wide Screens 20"



flipIT® 23 LCD Workstation for 16:9 Wide Screens 24"

