

Meet the

# flipIT<sup>®</sup> family

Monitor Mounts for  
Multi-Use Collaborative Spaces

flipIT lift<sup>®</sup>

Motorless Monitor Lift



SMARTdesks<sup>®</sup>

flipIT Laptop Safe<sup>®</sup>

flipIT<sup>®</sup>  
Monitor Mount System

PULL



## FIL-18

Compartment:  
16 x 14.625 x 2.5

Smaller footprint  
Fits most workspaces  
Sized for smaller laptops  
Full connectivity

### Perfect for:

- Offices
- Conference Tables
- Classrooms
- Presenter Podiums
- Reception Areas
- Customer Service Areas
- Healthcare Settings

Meet HIPAA Compliance §164.310  
Physical Safeguards restricting access to  
patient information

# flipIT Laptop Safe<sup>®</sup>

for multi-use workspaces



## FIL-23

Compartment:  
22 x 14.625 x 2.5

Sized for larger laptops  
Full connectivity

# Full featured security and ergonomic

"Mushroom Tops" wire management cable pass-throughs—laptop charges even when safe is closed.

Vented for cooling air flow

Lock for security

Touch Latch keeps lid stable when closed.

Compartment sides

Optional telecom plate customized with F/F connectors you specify

Place pads to support laptop and create cooling air flow

flipIT Laptop Safe® is a measure of compliance with HIPAA § 164.304 Physical Safeguards to protect a covered entity's electronic information system from unauthorized intrusion.

Permits laptop screen adjustment within range of 37° to enable neutral head and neck position.

Low profile lid is ergonomically ideal:


- Lower than laptop screen
- Promotes unobstructed sight lines
- Ensures neutral neck and head position
- Perfect for those who wear corrective lenses, especially multi-focal lenses.

## flipIT Kits® contain everything you need for easy installation.

Each flipIT Kit® has fully illustrated, complete installation directions, including a precise paper template to use for locating the cut-out and drilling pilot holes lock/latch mechanism.

## Anyone can install flipIT® into any work surface with this criteria:

- 5 inches required in front of unit cutout for lock/latch control
- 2.75" required in back of unit for structural integrity.
- Minimum width for multi-user installations: 30 inches
- Clearance distance under surface for operation: 6.5 inches
- Clearance distance over table top: 8 inches
- Recommended desktop thickness: 30mm (1.18 inches)
- Recommended desktop height for use with keyboard: 28 inches
- Optimal table top widths for single workstations:
  - flipIT® 18: 36 inches
  - flipIT® 23: 44 inches

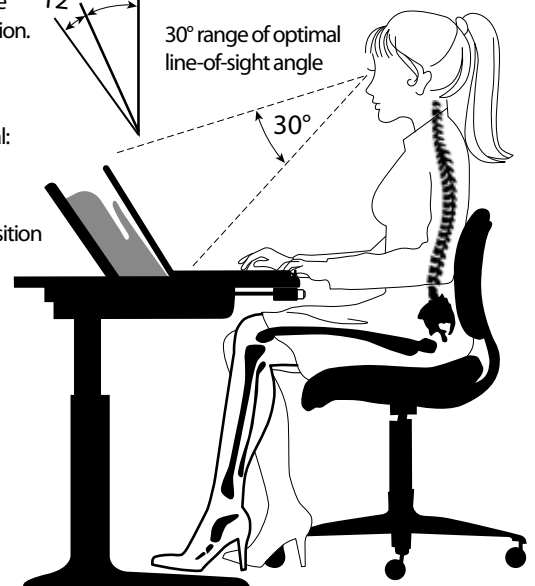

# flipIT® monitor mount system

flipIT Kits® install to make any desktop a multi-use workspace.

Two styles:  
With or without keyboard platform.

Two widths:  
Permits best fit for desktop space and monitor size desired.

Ideal for any office or meeting space.  
The low screen position facilitates communication with unobstructed sight lines.

Perfect for conference room studios where cameras are used for tele-conferencing. Data screens can now be placed in the personal spaces of participants, or flipped into the table top if not needed.

flipIT® FIH-23  
monitor mount system  
for VESA compliant displays  
up to 23 inch case width



PULL handle releases top latch and actuates opening.

Offices | Home Offices  
Classrooms  
Conference Rooms  
Collaboration Settings  
Retail Services  
Defense Operations Centers  
Reception/Security Areas  
Airport Terminals  
Financial Institutions  
Hotel/Hospitality

Semi-recessed display system  
converts to a multi-use desk top.  
Excellent ergonomic orientation prevents  
fatigue and increases productivity.

flipIT® FIK-19  
monitor mount system with keyboard platform  
for VESA compliant displays up to 18.75 inch case width

26 x 8 inch keyboard platform  
releases top latch and  
actuates opening.



## “Multi-use” your workspace!

Display and keyboard disappear when focus is on text media.




### Ergonomic display positioning

flipIT® screen angle is adjustable within range of 37° to accommodate neutral head and neck position for a range of human statures.

30° range of optimal line-of-sight angle

Semi-recessed display position is ergonomically ideal:

- Permits unobstructed sight lines
- Ensures neutral neck and head position
- Perfect for those who wear corrective lenses, especially multi-focal lenses.

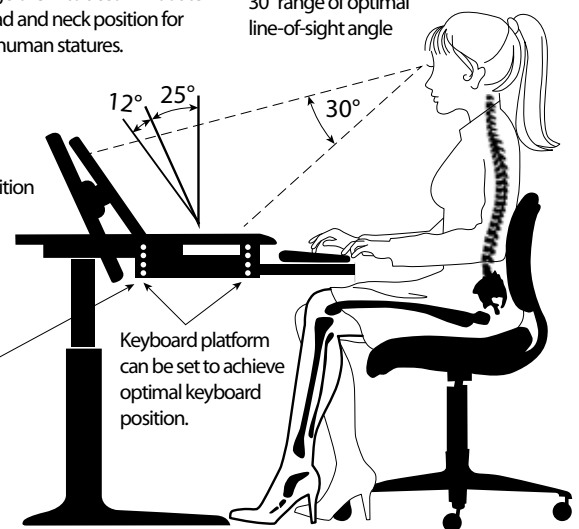

Heavy duty keyboard platform with Genuine Accuride® Bearing Slides: 75 lb. load rating

Keyboard platform can be set to achieve optimal keyboard position.

**flipIT Kits® contain everything you need for easy installation.**

Each flipIT Kit® has fully illustrated, complete installation directions, including a precise paper template to use for locating the cut-out and drilling pilot holes for keyboard platform and PULL handle latch.

### Anyone can install flipIT® into any work surface with this criteria:

- 8 inches required in front of unit cutout for PULL handle or keyboard platform.
- 2.75" required in back of unit for structural integrity. Monitors usually mount such that they extend below the flipIT® lid. When closed, this allowance is necessary for monitor parking space.
- Minimum width for multi-user installations: 30 inches
- Clearance distance under surface for operation: 8.5 inches
- Clearance distance over table top: 9 inches
- Recommended distance from floor to under side of desktop for keyboard mounting: 29-29.25 inches
- Recommended desktop thickness: 30mm (1.18 inches)
- Recommended desktop height for use with keyboard: 28 inches; with keyboard tray: 30 inches
- Optimal table top widths for single workstations flipIT® 19: 36 inches; flipIT® 23: 44 inches



## Controlled speed without motors or electricity

- No counterweights
- No spring adjustments
- Supports VESA compatible flat screens and all-in-ones
- Monitor Case Width MAX: 22.75"
- Screen tilt adjustment
- Two models for monitor weight ranges: 5-15 and 15-24 pounds
- Eleven mounting positions are available to select screen height

Easy to operate, push down and the monitor pops up quickly, smoothly and quietly. The screen angle may be adjusted for optimum viewing by all.

To stow, restore the screen angle to vertical, push the monitor down into the table top until the latch engages. Done.

The monitor is protected under the table with a metal cowl, which provides protection and comprehensive wire management. All easy to install.

# flipIT Kits<sup>®</sup> multi-use collaborative conference spaces

## flipIT<sup>®</sup> monitor mount system

**FIK 19** flipIT<sup>®</sup> 19 with keyboard platform

**FIH 19** flipIT<sup>®</sup> 19 PULL latch release

**FIK 23** flipIT<sup>®</sup> 23 with keyboard platform

**FIH 23** flipIT<sup>®</sup> 23 PULL latch release

**OPT-LOK** flipIT<sup>®</sup> keyed lock option

Required to meet HIPAA Compliance §164.304 Physical Safeguards restricting access to patient information.



### Materials:

- Lids are medium density fiberboard (MDF) finished in black 3 dimensional laminate (3DL).
- Top surface lid color options are black (standard), or may be custom ordered to match your existing desk top.
- All steel construction of flipIT<sup>®</sup> mechanical
- Pneumatic spring actuated opening
- Accuride<sup>®</sup> all-steel ball bearing keyboard platform slides
- All finished metal parts are standard in black powdercoat; however, special order RAL color matches can be accommodated on a custom order basis.
- Made in USA

## flipIT laptop safe<sup>®</sup>

**FIL-18** Compartment: 16 x 14.625 x 2.5

**FIL-23** Compartment: 22.5 x 14.625 x 2.5

### Materials:

- Lids are medium density fiberboard (MDF) finished in 3 dimensional laminate (3DL)
- All steel construction of flipIT<sup>®</sup> mechanical
- Finished metal parts are standard in black powdercoat
- Made in USA



## flipITlift<sup>®</sup> motorless monitor lift

**MS-FLIFT-TLG** monitor weight 5-15 lbs

**MS-FLIFT-THG** monitor weight 15-24 lbs

### Specifications:

- Max monitor case width: 22.75"
- VESA compatible flat screens and all-in-ones
- Screen tilt adjustment
- Total height, stored position: 27.3"
- Travel distance: 20"
- Finish black powder coat





flipIT laptop safe®



flipITlift® motorless monitor lift



[www.smartdesks.com](http://www.smartdesks.com) 800-770-7042



flipIT® monitor mount system