

flipIT[®] FD
19" LCD Display



Simple.

flipIT open and the monitor comes on.
flipIT closed and the monitor turns off.

A sensor detects the ambient light and automatically adjusts the display brightness in a range from 10 nits to "sunlight readable" 230 nits.

You save energy by knowing that the display is off when the flipIT lid is closed. You prolong product life by running the LCD at an ideal brightness, adjusted for the ambient lighting of the room. And you do this by doing... nothing.

But first, you have to do one little thing. Contact SMARTdesks.



The ambient light sensor saves your eyes and the life of the monitor.

SMARTdesks

www.smartdesks.com


800 770 7042



19" LCD Display Specifications



LCD Display:	19" TFT Active Matrix Panel
Display Size:	376.32 301.056 mm (14.8157 in. x 11.8526 in.)
Pixel Pitch:	0.294 x 0.294 mm (0.01157 in. x 0.01157 in.)
Display Mode:	VGA 640x 350(70 Hz) VGA 720 x 400 (70 Hz) VGA 640 x 480 (60/72/75 Hz) SVGA 800 x 600 (60/72/75 Hz) XGA 1024 x 768 (60/70/75 Hz) SXGA 1280 x 1024 (60/70 Hz)
Max. Resolution	1280 x 1024
Contrast Ratio:	1:500
Brightness:	250 cd/m ²
Response Time:	15mS (rising) 10mS(falling)
Display Colors:	16M (dithering)
Viewing Angle:	+85° ~ -85° (L/R), +85°~ -85°(U/D) (Min.)
Input Signal:	Video: RGB Analog 0.7V Peak to Peak Sync: TTL Positive or Negative
Video Signal:	15 pin mini D-sub
Connector:	DVI
Video Input:	VGA/DVI
Front Control:	Power Switch, Menu, Select(Up, Down), Auto-Adjustment
OSD:	Auto-Adjustment, Contrast, Brightness, Clock, Phase, H-Position, V-Position, Color Temperature, Volume
Plug & Play:	DDC1/2B
Audio System:	2W per channel
Power:	Universal 90-240V, 12V/80W
Dimensions:	426w x 444h x 215TK mm (16.7717 x 17.4803 x 8.4645 in.)
Weight:	10 Kg (22.046 lb)
Certification:	FCC-B. CE, UL, TUV

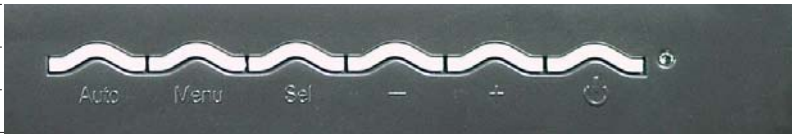

SMARTdesks

www.smartdesks.com
800 770 7042