




SMARTdesks™

SPECIFICATIONS

Sub-Surface Mounted LCD Monitor Desk

Glass Top

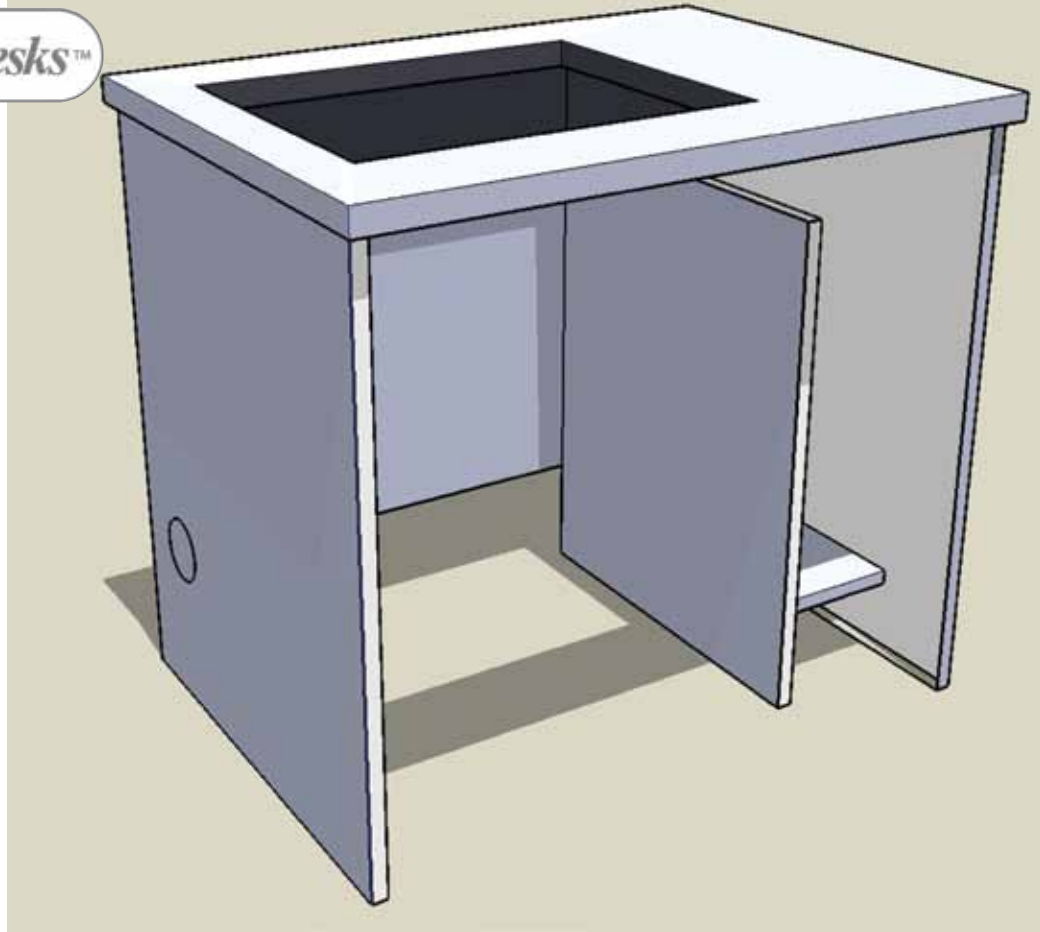

Top Surface

0.048" thick, high-pressure laminate (exceeds performance requirements of NEMA 3-1995 Grade HGS) bonded to 30mm thick 50 lb. medium density particleboard with phenolic resin impregnated backer sheet. All edges are banded in 3mm thick, color-thru PVC mechanically applied under pressure and heat.

Wire Access Grommet

An 80mm diameter wire access grommet with cover is placed in the desk top to channel monitor cables to the CPU bay below the surface.

CPU Bay

Accommodates mid-tower CPU case.

Base Panels - 0.020" thick melamine coated finish thermally fused to both sides of 19mm thick 47 lb. medium density particleboard. All exposed edges (including bottom edges in contact with the floor - to prevent water damage) are banded in 3mm thick, color-thru PVC mechanically applied under pressure and heat.

Keyboard/Mouse Platform

Pullout platform at 27" above floor match base panel finish and edge trim. Mounted with full-extension ball bearing slides with lifetime warranty.

Construction

European 32mm woodworking technology employing steel-to-steel pin and cam connections (thru-drilled for full panel integrity) where needed to provide durability, ease of assembly and modularity.

Ventilation

Panels are assembled to permit adequate airflow around components.

Floor Glides

All units are provided with standard adjustable 1¼" steel leveling glides with vinyl shield attached to metal inserts in the vertical support panels. 3/4" height adjustment range.

Integral Wire Management™

Vertical and horizontal wire channeling, 80mm side access grommets are positioned to align with other components and wall power/data access points.

Glass

Tinted (T41 rating) and tempered.

Glass for standard monitors is 18" D x 18" W, 1/4" thick and 21" D x 18" W, 1/4" thick.

Glass for oversized monitors is 21" D x 21" W, 1/4" thick and 24" D x 21" W, 1/4" thick.